





WWW.C4MECCANICA.IT

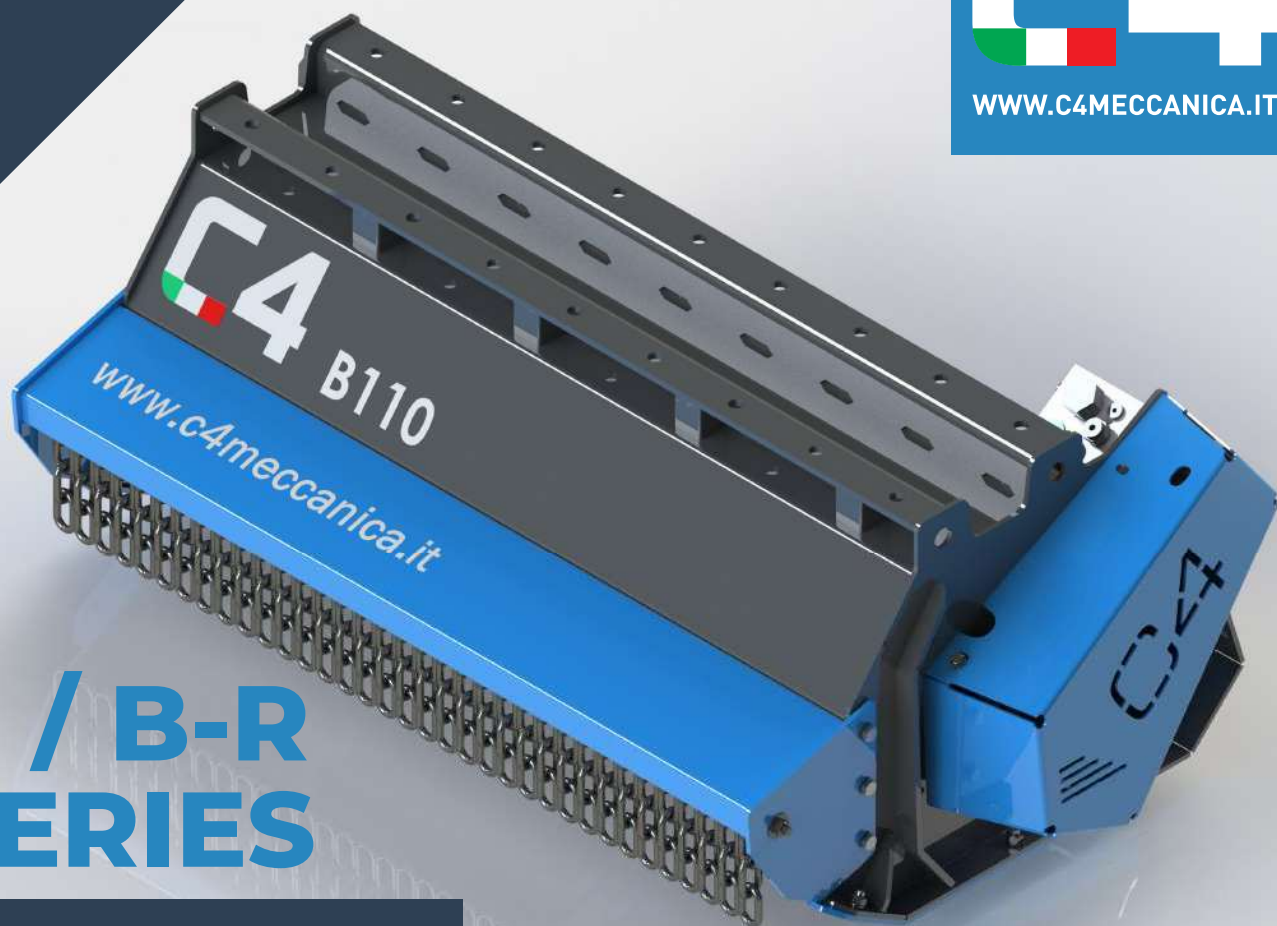

# B / B-R SERIES

HYDRAULIC MULCHERS  
FOR EXCAVATORS  
FROM 3 TO 5 TONS

Rotor with hammers

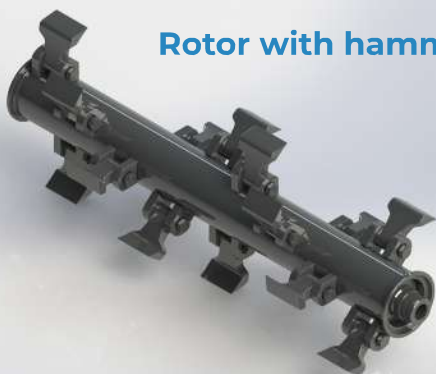

Rotor with knives




**B90/B90R  
B110/B100R**

HYDRAULIC MULCHERS





# B SERIES

B90

B110

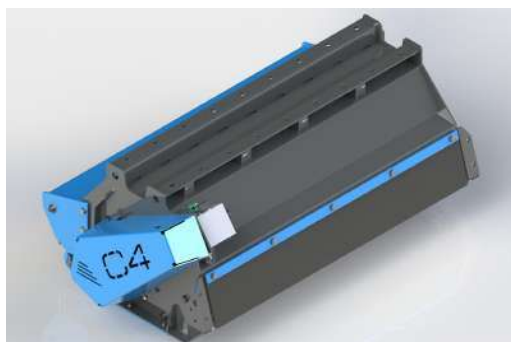

MODEL	B90	B110
CUTTING WIDTH (mm)	890	1070
RECOMMENDED EXCAVATOR (ton)	3-4	3.5-5
WEIGHT (Kg)	205	235
OIL PRESSURE (bar)	200	200
OIL FLOW (l/min)	30-80	40-80
NUMBER OF KNIVES	36	48
NUMBER OF HAMMERS	12	16
MAX CUTTING DIAMETER (mm)	50	50
A DIMENSION (mm)	710	710
B DIMENSION (mm)	1015	1215
C DIMENSION (mm)	463	463
SELF-LEVELLING SUPPORT WEIGHT (Kg)	31	31
EXCAVATOR ATTACHMENT WEIGHT (min-max Kg)	12-20	12-20




# B-R SERIES





(Reversible - without support roller)

B90R

B110R

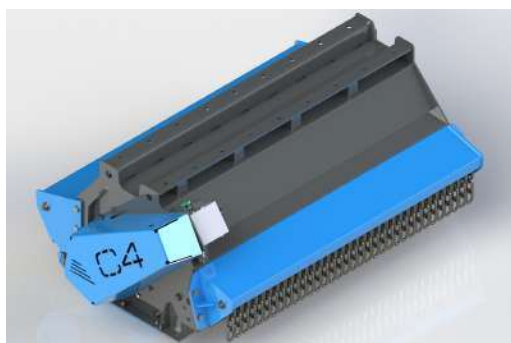

MODEL	B90R	B110R
CUTTING WIDTH (mm)	890	1070
RECOMMENDED EXCAVATOR (ton)	3-4	3.5-5
WEIGHT (Kg)	205	235
OIL PRESSURE (bar)	200	200
OIL FLOW (l/min)	30-80	40-80
NUMBER OF KNIVES	36	48
NUMBER OF HAMMERS	12	16
MAX CUTTING DIAMETER (mm)	50	50
A DIMENSION (mm)	810	810
B DIMENSION (mm)	1015	1215
C DIMENSION (mm)	463	463
SELF-LEVELLING SUPPORT WEIGHT (Kg)	31	31
EXCAVATOR ATTACHMENT WEIGHT (min-max Kg)	12-20	12-20






Direct transmission with motor inside the machine protected from impacts and collisions. Standard with high pressure oil seal.




Fluidbox for complete and safe engine management, with maximum shockproof valve, anti-cavitation system and flow regulation to set the rotor speed correctly.



Replaceable wear-resistant skids.



Shaft rotation clockwise.  
Unidirectional working direction.  
(B series)



Shaft rotation clockwise.  
Bidirectional working direction.  
(B-R series)



Double-bottomed case to increase robustness and optimize the cutting volume.




Standard with 2mt hydraulic hoses, available as **optional**: set of hoses with customized lengths.



The machine is standard in a two-pipe configuration, the fluidbox will manage the flow of oil coming from engine drainage. In the event that the back pressure at the discharge is greater than 8 bar, it's possible to provide the third drainage tube for direct tank discharge.



Rotor can be equipped with three-blade knives for higher shredding capacity and lower demand of power. Rotor can be equipped with hammers to tackle branches and shrubs up to 50 mm in diameter.




B series:  
-Front protection with chains.  
-Rear protection with wear-resistant rubber strip.  
B-R series:  
- Front and rear protection with chains.



Rear support roller adjustable in three positions for cutting height adjustment. (B version).



Predisposition of holes on the upper part of the machine, which allows to position customized attachment on 7 different positions.



- Three-blade knife
- Hammer



Available as **optional**: standard attachment and pins with customized measurements, flat plate for attachment as standard.



Self-levelling support (**optional**), that allows an oscillation of the mulcher to accommodate the unevenness of the ground protecting it from bumps.